

14 Collings Avenue, West Berlin, NJ 08091

**TA256-10 Wedge Grip
10 kN**


Order information

TA256 grips are supplied in pairs, but can also be ordered as a single grip (0.5 pair).

Grips and jaws need to be ordered separately.

Jaws with other dimensions and surfaces on request.

Item No.	TA256-10
Tensile force	10 kN
Jaw Opening	0-8 mm depending on jaws
Coupling	Af159 or Af20 Further couplings on request
Body	Steel, nickel-plated
Jaws	Steel, nickel-plated, hardened
Temperature range	0°C up to +130°C (TA256-10) -70°C up to +280°C (TA256-10-T280)
Weight (each grip)	1.36kg (without jaws)
Scope of delivery	1 pair of grips (without jaws)

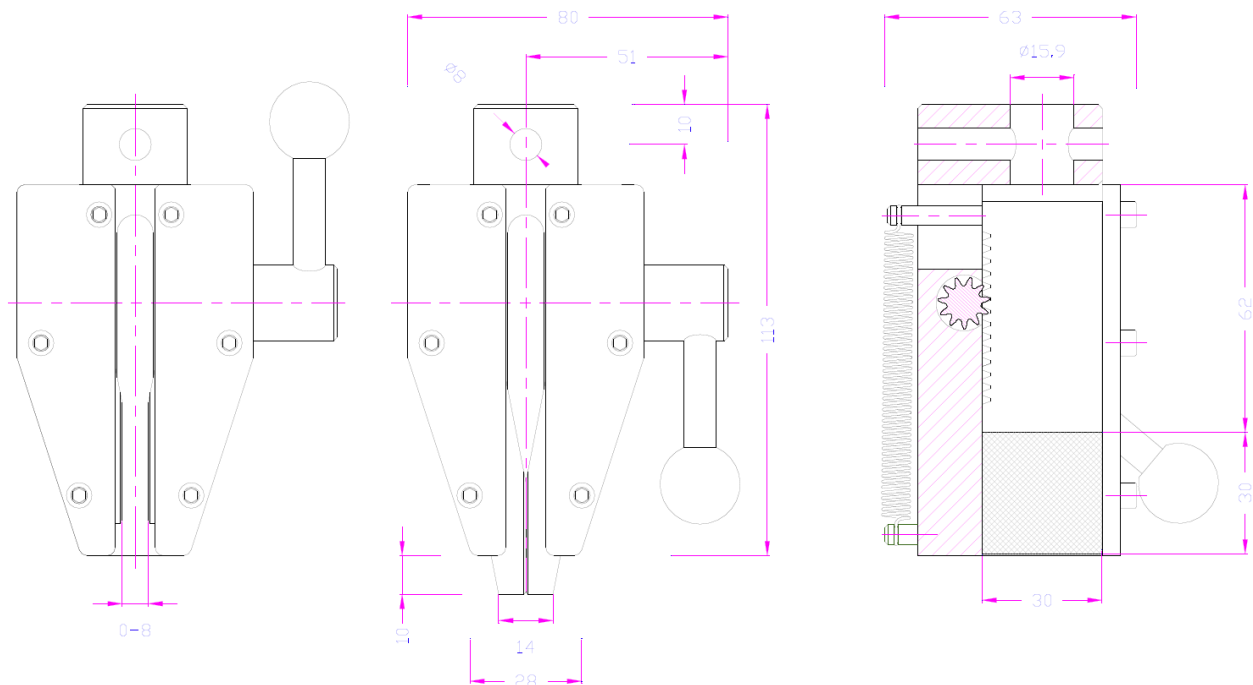

14 Collings Avenue, West Berlin, NJ 08091

Scope of supply: 1 set = 4 jaws

Item no.	Surface	Clamping surface H x W	Opening	Weight 1 pair
TA256-B	Blank jaws	30 x 30 mm	0 – 8 mm	0.44 kg
TA256-BP	Pyramid (serrated) jaws	30 x 30 mm	0 – 8 mm	0.43 kg
TA256-BV	V jaws	Height 30 mm	3 – 8 mm Ø	0.44 kg
TA256-BG	Rubber-coated jaws	30 x 30 mm	0 – 6 mm	0.45 kg
TA256-BD	Diamond-coated jaws	30 x 30 mm	0 – 8 mm	0.44 kg



TA256-B
Blank jaws

- Suitable for own further treatments
- Nickel-plated



TA256-BP
Pyramid (serrated) jaws

- Multipurpose application range
- Pyramids 1x45°
- Hardened steel 58 HRC
- Nickel-plated



TA256-BV
V jaws

- For all kinds of round samples
- Tooth pitch 1 mm
- Hardened steel 58 HRC
- Nickel-plated





TA256-BG
Rubber-coated jaws

- 1 mm rubber coating (NBR)
- Nickel-plated



TA256-BD
Diamond jaws

- Clamping surface coated with synthetic diamonds D91 (170/200 mesh)
- Nickel-plated



Jaws with other dimensions and surface coatings on request